

SKD窒化 段付エジェクタピン

MB1


径P寸法指定・N寸法指定タイプ

材質	硬度	つば厚(T)	Code
SKD61 窒化処理	表面:900HV~ 内部:40~45HRC	4	ESN4NN

⚠ D寸法精度保証範囲 ④ 本冊 P.1338

⚠ 硬度保証範囲 ④ 本冊 P.1339

⚠ 窒化表面硬度保証範囲 ④ 本冊 P.1339

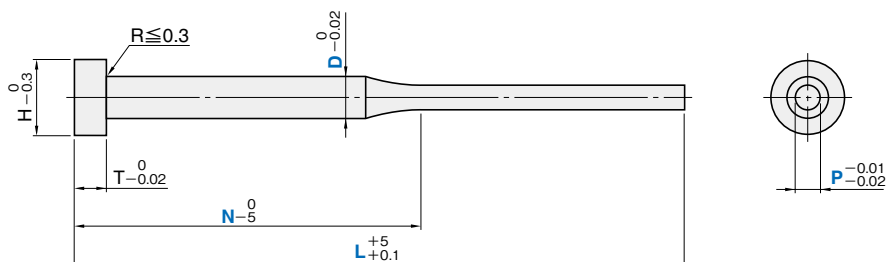

Code No.		L			0.01	1	T	H		
Code	D				P	N				
ESN4NN	1.5	100	150	200	0.80 ~ 1.40	$N \geq 15$ and $20 \leq (L - N) \leq 150$	4	3		
	2				0.80 ~ 1.90			4		
	2.5				0.80 ~ 2.40			5		
	3	100	150	200	250	300		1.00 ~ 2.90	$N \geq 15$ and $20 \leq (L - N) \leq 200$	6
	3.5							1.50 ~ 3.40		7
	4							1.50 ~ 3.90		8
	4.5							2.50 ~ 4.40		9
	5							3.00 ~ 4.90		
	5.5							3.50 ~ 5.40		
	6							4.00 ~ 5.90		



Code No. | L | P | N
 ESN4NN 3 - 150 - P1.10 - N40



5 日目
 発送 ④ 本冊 P.30



数量別割引価格 (本冊 P.30) (△1円未満切り捨て)				
1~4	5~12	13~49	50~100	101~
100%	95%	90%	80%	お見積

追加工にも数量別割引価格を適用します。

規格変更

MB2

Code No.		@/P(1~4P)				
Code	D	L100	L150	L200	L250	L300
ESN4NN	1.5	610	640	660	—	—
	2	580	610	630	—	—
	2.5	550	580	600	690	850
	3	550	580	610	730	890
	3.5	580	610	630	800	980
	4	620	650	670	870	1,030
	4.5	630	660	690	900	1,100
	5	640	670	700	920	1,180
	5.5	710	740	770	980	1,270
	6	710	740	770	980	1,270



追加工詳細 (本冊 P.212)



Code No. | L | P | N | KC・WKC…etc.
ESN4NN 3 - 150 - P1.10 - N40 - TC3.1

図	Code (@/P)	追加工内容	図	Code (@/P)	追加工内容	図	Code (@/P)	追加工内容						
つばカット 	KC 100	⑩ 0.1 D/2≤KC<H/2	つばカット2面目角度指定 	KGC 300	KGC: ⑩ 0.1 AG: ⑩ 1 D/2≤KGC<H/2 0<AG<360	H寸法変更(精密) 	HCC 400	⑩ 0.1 D+1≤HCC<H-0.3						
つばカット平行2面 	WKC 200	⑩ 0.1 D/2≤WKC<H/2	つばカット120°3面 	KTC 400	⑩ 0.1 D/2≤KTC<H/2	T寸法変更 	TC 200	⑩ 0.1 2.0≤TC<T T-TC≤Lmax-L						
つばカット平行2面 	KAC KBC 300	⑩ 0.1 D/2≤KAC, KBC<H/2	ノック穴加工 	NN 200	<table><tr><td>T</td><td>d</td><td>ℓ</td></tr><tr><td>4</td><td>2</td><td>3</td></tr></table>	T	d	ℓ	4	2	3	識別文字 	NHC 1,2文字 50 3,4文字 100	1文字→2≤H 2文字→5≤H 3文字→7≤H 4文字→7≤H
T	d	ℓ												
4	2	3												
つばカット90°2面 	RKC 200	⑩ 0.1 D/2≤RKC<H/2	スプリングピン加工 	NC 200	<table><tr><td>T</td><td>d</td><td>ℓ₁</td></tr><tr><td>4</td><td>2</td><td>5</td></tr></table>	T	d	ℓ ₁	4	2	5	識別文字 連番 	NHN 1,2文字 50 3,4文字 100	1文字→2≤H 2文字→5≤H 3文字→7≤H 4文字→7≤H
T	d	ℓ ₁												
4	2	5												
つばカット3面 	DKC 300	⑩ 0.1 D/2≤DKC<H/2	ノックピン加工 	NS 200	<table><tr><td>T</td><td>d</td><td>ℓ₁</td></tr><tr><td>4</td><td>2</td><td>5</td></tr></table>	T	d	ℓ ₁	4	2	5			
T	d	ℓ ₁												
4	2	5												
つばカット4面 	SKC 400	⑩ 0.1 D/2≤SKC<H/2	H寸法変更 	HC 200	⑩ 0.1 D<2→H-1≤HC<H D≥2→D+1≤HC<H									

段付エジクタピン

SKD
梱
装

径P寸法指定 N寸法指定タイプ



RoHS10

MB3

SKD窒化 段付エジェクタピン


全長L寸法指定・径P寸法指定タイプ

材質	硬度	つば厚(T)	Code
SKD61 窒化処理	表面:900HV~ 内部:40~45HRC	4	ESN4NS

△ D寸法精度保証範囲 〰 本冊 P.1338

△ 硬度保証範囲 〰 本冊 P.1339

△ 窒化表面硬度保証範囲 〰 本冊 P.1339

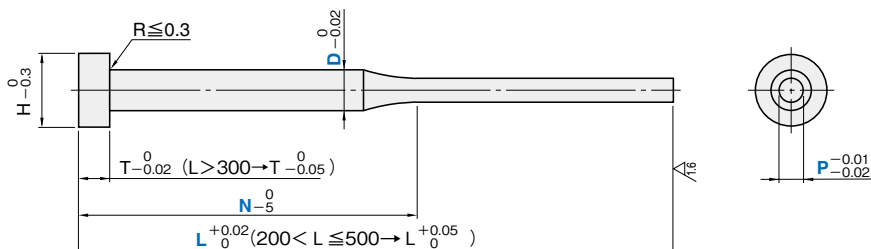

Code No.		0.01		1	T	H
Code	D	L	P	N		
ESN4NS	1.5	40.00~200.00	0.80 ~ 1.40	$N \geq 15$ and $20 \leq (L - N) \leq 150$	4	3
	2	40.00~300.00	0.80 ~ 1.90			4
	2.5	40.00~400.00	0.80 ~ 2.40			5
	3		1.00 ~ 2.90			6
	3.5		1.50 ~ 3.40	$N \geq 15$ and $20 \leq (L - N) \leq 200$		7
	4		1.50 ~ 3.90			8
	4.5		2.50 ~ 4.40			9
	5	40.00~500.00	3.00 ~ 4.90			10
	5.5		3.50 ~ 5.40			11
	6		4.00 ~ 5.90			12
	6.5		4.50 ~ 6.40			13
	7		4.90 ~ 6.90			14
	8		5.90 ~ 7.90			15
	10		7.90 ~ 9.90	16		
12	8.90 ~ 11.90		17			



Code No. | L | P | N
 ESN4NS 3 - 150.00 - P1.10 - N50



D < 6 | D ≥ 6
 6 日目 | 8 日目
 発送 | 発送

〰 本冊 P.30





▶数量別割引価格 (※ 本冊 P.30) (▲1円未満切り捨て)

1~4	5~12	13~49	50~100	101~
100%	95%	90%	80%	お見積

追加加工にも数量別割引価格を適用します。

規格変更

MB4

Code No.		@/P(1~4P)							
Code	D	L 40.00 ~100.00	L 100.01 ~150.00	L 150.01 ~200.00	L 200.01 ~250.00	L 250.01 ~300.00	L 300.01 ~350.00	L 350.01 ~400.00	L 400.01 ~500.00
ESN4NS	1.5	640	670	690	830	1,000	—	—	—
	2	610	640	660	770	920	—	—	—
	2.5	580	610	630	720	880	—	—	—
	3	580	610	640	760	940	1,330	1,580	—
	3.5	610	640	660	830	1,030	1,420	1,620	—
	4	640	680	700	920	1,080	1,430	1,630	1,880
	4.5	690	710	740	970	1,150	1,370	1,600	1,890
	5	720	780	810	1,030	1,230	1,370	1,600	1,890
	5.5	750	850	880	1,100	1,320	1,470	1,660	2,160
	6	750	850	880	1,100	1,320	1,470	1,660	2,160
	6.5	800	960	990	1,160	1,460	1,610	1,820	2,120
	7	800	960	990	1,160	1,460	1,610	1,820	2,120
	8	810	990	1,030	1,320	1,480	1,640	1,880	2,200
	10	1,010	1,200	1,360	1,500	1,650	1,820	2,160	2,430
	12	1,260	1,260	1,460	1,640	1,820	2,020	2,330	2,620



追加加工詳細 (※ 本冊 P.212)



Code No. L P N KC-WKC...etc.

ESN4NS 3 - 150.00 - P1.10 - N50 - TC3.1

図	Code (@/P)	追加加工内容	図	Code (@/P)	追加加工内容	図	Code (@/P)	追加加工内容								
つばカット 	KC 100	⑩ 0.1 D/2≤KC<H/2	つばカット120°3面 	KTC 400	⑩ 0.1 D/2≤KTC<H/2	タップ穴加工 	MC 300	<table><tr><th>D</th><th>M</th></tr><tr><td>8</td><td>4</td></tr><tr><td>10</td><td>5</td></tr><tr><td>12</td><td>6</td></tr></table>	D	M	8	4	10	5	12	6
D	M															
8	4															
10	5															
12	6															
つばカット平行2面 	WKC 200	⑩ 0.1 D/2≤WKC<H/2	ノック穴加工 	NN 200	<table><tr><th>T</th><th>d</th><th>ℓ</th></tr><tr><td>4</td><td>2</td><td>3</td></tr></table>	T	d	ℓ	4	2	3	先端R加工 	HRC 200	⑩ 0.1 0.2≤HRC<P/2		
T	d	ℓ														
4	2	3														
つばカット平行2面 	KAC KBC 300	⑩ 0.1 D/2≤KAC, KBC<H/2	スプリングピン加工 	NC 200	<table><tr><th>T</th><th>d</th><th>ℓ1</th></tr><tr><td>4</td><td>2</td><td>5</td></tr></table>	T	d	ℓ1	4	2	5	先端C面加工 	HGC 200	⑩ 0.1 0.1≤HGC<P/2		
T	d	ℓ1														
4	2	5														
つばカット90°2面 	RKC 200	⑩ 0.1 D/2≤RKC<H/2	ノックピン加工 	NS 200	<table><tr><th>T</th><th>d</th><th>ℓ1</th></tr><tr><td>4</td><td>2</td><td>5</td></tr></table>	T	d	ℓ1	4	2	5	識別文字 	NHC 1,2文字 50 3,4文字 100	1文字→2≤H 2文字→5≤H 3文字→7≤H 4文字→7≤H		
T	d	ℓ1														
4	2	5														
つばカット3面 	DKC 300	⑩ 0.1 D/2≤DKC<H/2	H寸法変更 	HC 200	⑩ 0.1 D<2→H-1≤HC<H D≥2→D+1≤HC<H	識別文字 連番 	NHN 1,2文字 50 3,4文字 100	1文字→2≤H 2文字→5≤H 3文字→7≤H 4文字→7≤H								
つばカット4面 	SKC 400	⑩ 0.1 D/2≤SKC<H/2	H寸法変更(精密) 	HCC 400	⑩ 0.1 D+1≤HCC<H-0.3											
つばカット2面目角度指定 	KGC 300	KGC: ⑩ 0.1 AG: ⑩ 1 D/2≤KGC<H/2 0<AG<360	T寸法変更 	TC 200	⑩ 0.1 2.0≤TC<T T-TC≤Lmax-L											

段付エレクトロピン

SKD
窒化

全長L寸法指定 径P寸法指定タイプ

