


RoHS10 六角穴付きボルト

MT5 穴貫通タイプ

材質 硬度	Code
SCM435 38~45HRC	CCBA

ねじ部 JIS B 0205 6g
ボルト精度 JIS B 1176

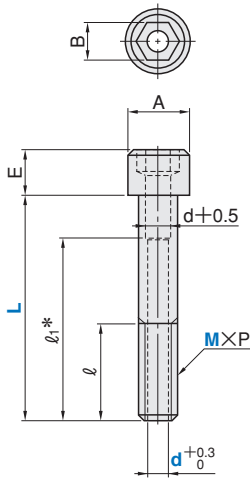

* M 6~ 8 L ≥ 40 → l₁ = 30
* M10~16 L ≥ 60 → l₁ = 50

Code No.				M×P	A	E	B	φ	@/P			
Code	M	L	d						1~49P	50P~		
CCBA	5	10	2	5×0.8	8.5	5	4	全ねじ Full Thread	22	68	64	
		20	2						128	121		
		30	2						188	178		
	6	10	3	6×1.0	10	6	5	24	全ねじ Full Thread	22	68	64
		20	3							128	121	
		30	3							188	178	
		40	3							233	221	
		50	3							293	278	
		60	3							353	335	
		70	3							413	392	
	80	3	480	456								
	8	20	4	8×1.25	13	8	6	28	全ねじ Full Thread	22	131	124
		30	4							195	185	
		40	4							240	228	
		50	4							300	285	
		60	4							360	342	
		70	4							420	399	
		80	4							488	463	
	10	20	5	10×1.5	16	10	8	32	全ねじ Full Thread	22	135	128
		30	5							199	189	
		40	5							248	235	
		50	5							308	292	
		60	5							368	349	
		70	5							428	406	
80		5	495							470		
12	30	6	12×1.75	18	12	10	36	全ねじ Full Thread	22	210	199	
	40	6							255	242		
	50	6							315	299		
	60	6							383	363		
	70	6							443	420		
	80	6							510	484		
	90	6							578	549		
16	50	7	16×2.0	24	16	14	44	全ねじ Full Thread	22	645	612	
	60	7							645	612		
	70	7							645	612		
	80	7							645	612		
	90	7							645	612		
	100	7							645	612		
	100	9							728	691		



Code No. _____
CCBA10-50-5



在庫 翌日 発送